

## Soft Down Stay

- \* Steel, zinc alloy, surface nickel plated
- \* Push this switch, rotate, can accomplish the result of picture 3
- \* Adjust \*screws to attain the best result
- \* Three installation results (See Figures)

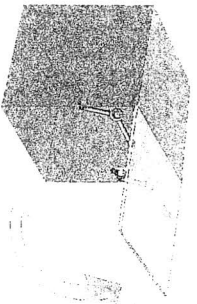


Figure 1. Push up

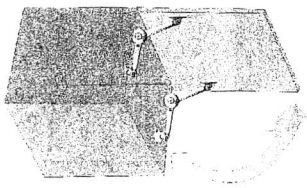


Figure 2. Uncover




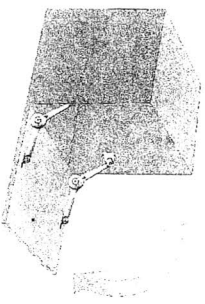


Figure 3. Suspend


## Bearing Capacity Instruction

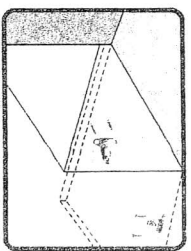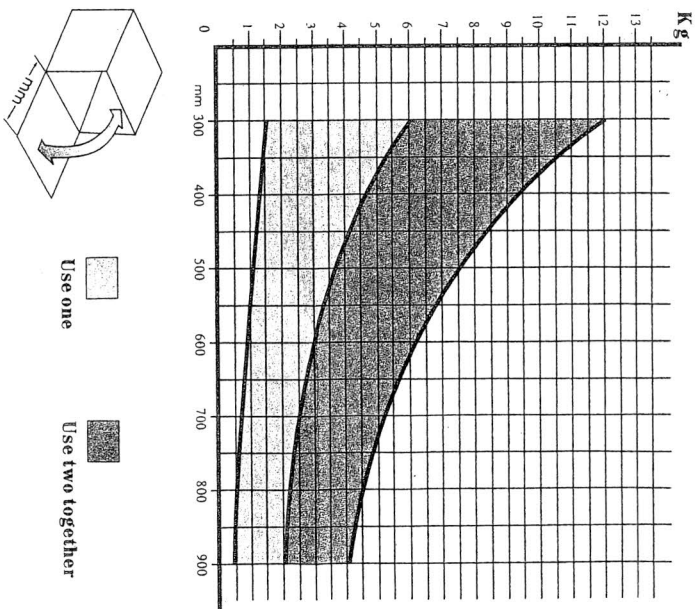


1. Put screws on the wood plate

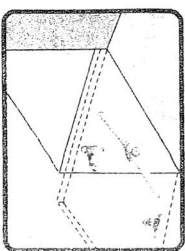

2. Put the body of the arm on the fixing plate



3. Adjust the screws of the Body to the point



4. It is possible to install on both sides

