








 **KRABY FOR WRITING DESK**

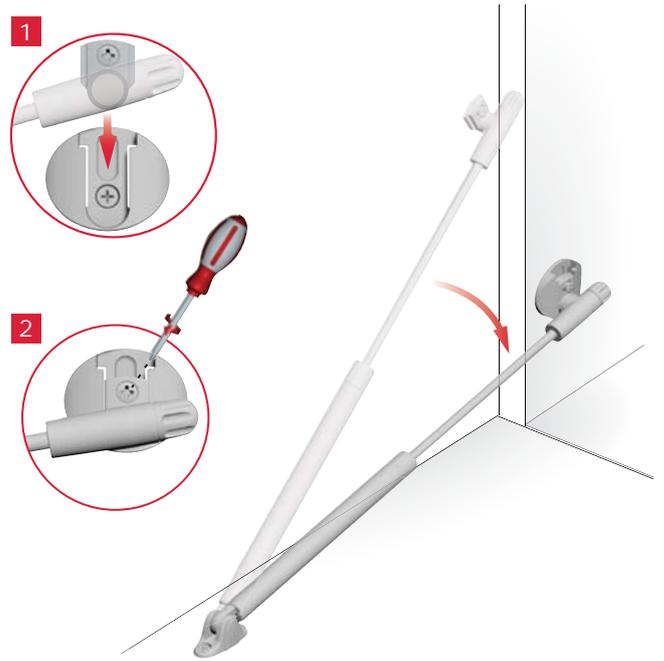


INSTALLATION

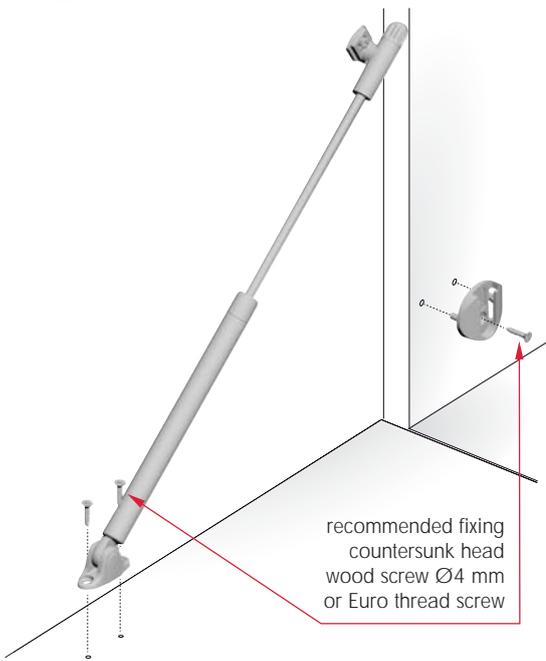

ADJUSTMENTS

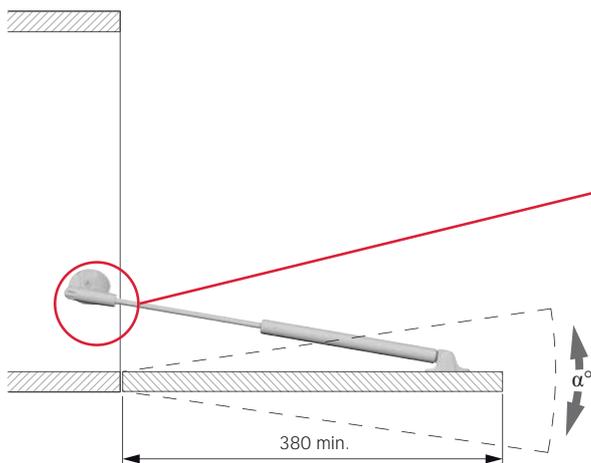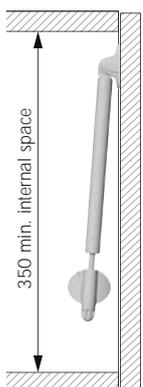

INCREASE OPENING ANGLE
Rotate the rotary knob.



REDUCE OPENING ANGLE
Move forward and back-
ward the piston base plate
in the bracket slot.

DRILLING PLANS WITH KIMANA HINGE









Magnet K Lock
visible or invisible

K Push Tech 20 mm
- With magnet
- Visible or invisible


For details refer to section
"PUSH CATCHES & MAGNETIC CATCHES".

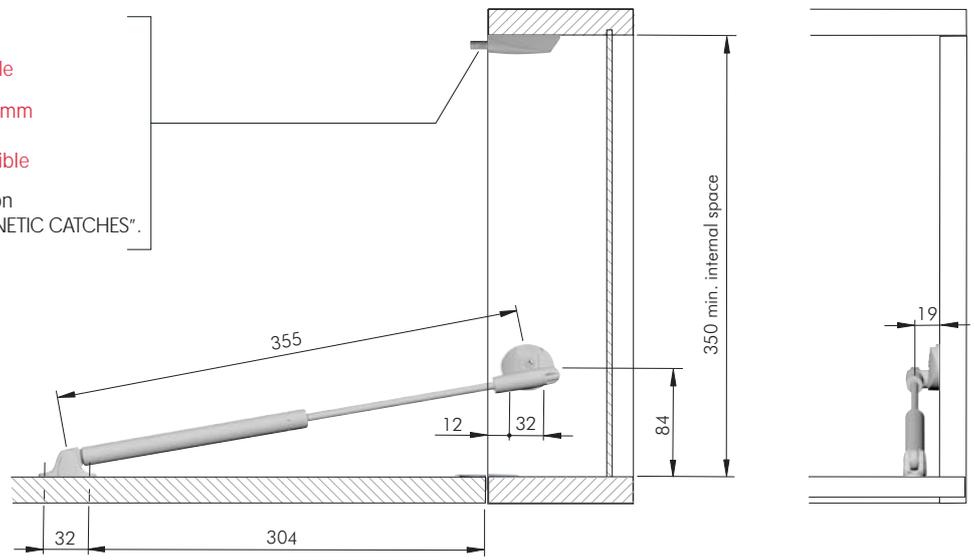


Number of stays chart


Rev. 00

h	Door weight (Kg)												
	1	2	3	4	5	6	7	8	9	10	11	12	
380 - 450										2 x Kraby			
451 - 550										2 x Kraby			



These are experimental results to be checked by the customer. Our technical department is at your disposal to test further cases out of this chart. In accordance with the actual European regulation, it is necessary to use two lid stays for each door.

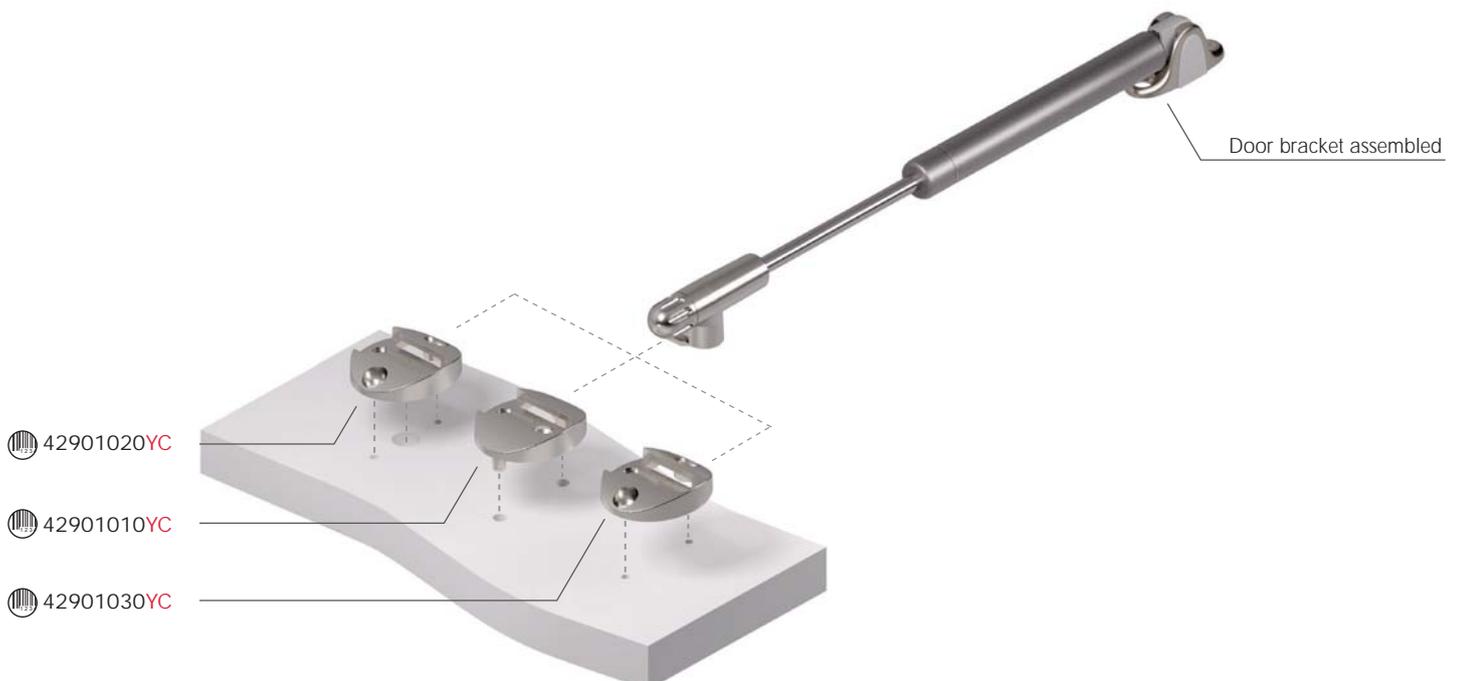

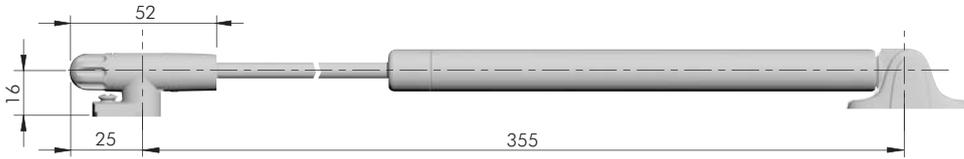

ZAnk

EP


ST

= 50 pcs.



42250030UZ

SIDE BRACKETS DRILLING PLANS

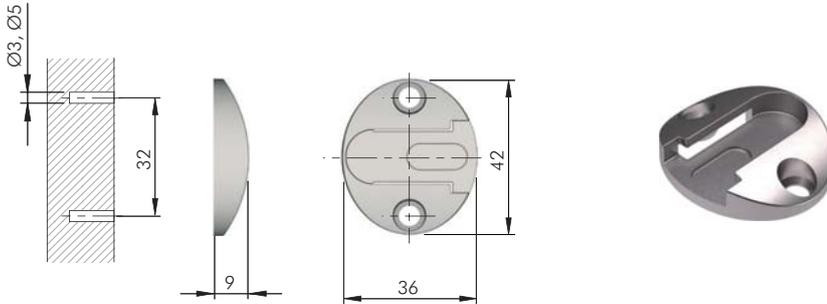


= Ø 3, Ø 5 mm

ZA

= 100 pcs.



42901030YC

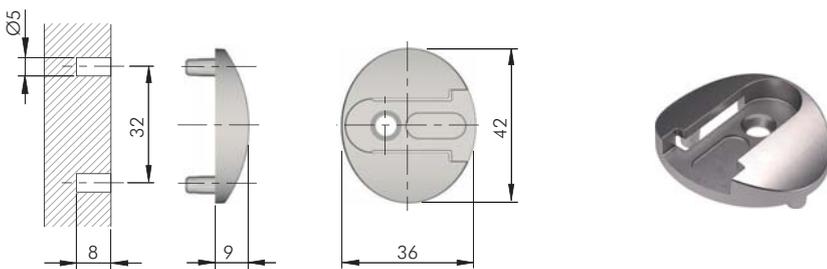


= Ø 5 mm

ZA

= 100 pcs.



42901010YC

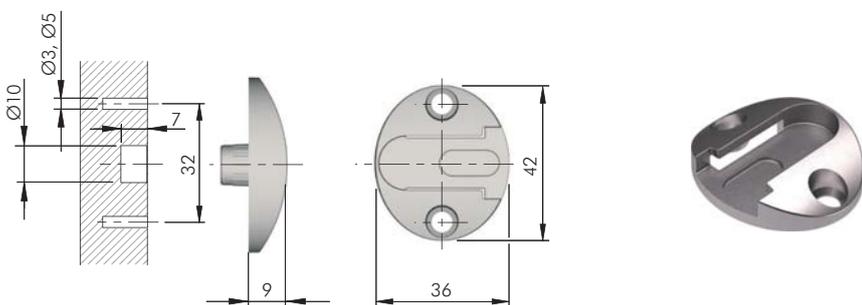

= Ø 3, Ø 5 mm + Ø 10 mm


ZA

= 100 pcs.




42901020YC

FIXING ACCESSORIES



= Ø 2,5 mm +
 = PZ2
 = 10.000 pcs.

60101570YA		16
60101580YA		18

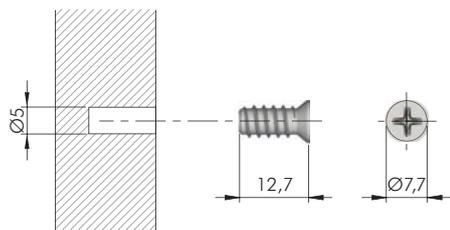

= Ø 5 mm +
 = PZ2
 = 5000 pcs.

60501050YA	